


FLOOR COATING

Monomid Epoxy Flooring System is easy-to-mix and forms a high-gloss finish on floors. Moisture resistant, it dries to touch

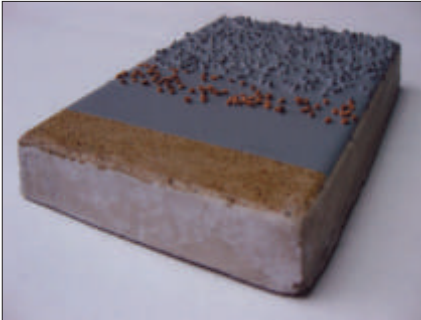

in three hours to form an abrasion- and chemical-resistant finish. The coating offers 5 to 10 mils dry film thickness in a single coat when applied over Monomid Clear Sealer. It can be applied over a variety of other primers, and anti-slip aggregate or sand can be added to improve traction. Chemline. 314-664-2230. www.steelcotemfg.com. **Circle 108.**

SHOTCRETE WATERPROOFING

Developed to provide a high performance waterproofing for shotcrete foundation walls, the Preprufe SCS waterproofing system consists of a durable composite



sheet applied against the soil retention system and hydrophilic expansive grout post-injected into the composite sheet through a series of injection ports. Grout injection occurs after shotcrete placement fills and seals the system. Grace Construction Products. 877-423-6491. www.graceconstruction.com. **Circle 109.**

RECYCLED CONCRETE MIX

Engineered specifically for masonry and new construction projects, the Fortress Extreme Green Masonry System includes block, mortar, grout, and structural parging



product focus: underlayments

SINGLE-COMPONENT UNDERLAYMENT

Floor-Top STG is a single-component, shrinkage-compensated, self-leveling floor topping and underlayment that can be poured or pumped. Used for smoothing and leveling concrete and rigid-based interior substrates prior to the application of a flooring system or coating, it may be applied up to 1 in. thick, only requires the addition of water, and accepts foot traffic in four hours. It may be color enhanced, acid



stained, and used with radiant heating floor systems. W.R. Meadows Inc. 800-342-5976. www.wrmeadows.com. **Circle 110.**

SELF-LEVELING UNDERLAYMENT

Cement based and resistant to water, Topcrete SL self-leveling portland cement topping and underlayment can be used over concrete (new or old), precast plank, quarry tile, and terrazzo floors. It offers rapid setting, high strength, and fine aggregate for feather edging. CPD Construction Products. 905-669-5013. www.cpd.ca. **Circle 111.**



QUICK-SETTING UNDERLAYMENT

Skimflow LC is a portland cement based self-leveling underlayment used to level or smooth most properly prepared substrates. It pours up to 1-1/2 in. thick, which can be extended with aggregate, sets in two to three hours, and withstands construction traffic. It provides a finished surface suitable for most floor covering systems. Dependable Chemical Co Inc. 800-227-3434. www.floorprep.com. **Circle 112.**

REPAIR UNDERLAYMENT

SureFlow 040 is a dry polymer modified cementitious blend that



when mixed with water produces a pourable, pumpable, self-leveling and self-smoothing floor underlayment for damaged, spalled, or otherwise rough or uneven surfaces. It is intended to be used at an average depth of not less than 1/8 in. over the highest point of the floor and on dry interior substrates only. Kaufman. 800-637-6372. www.kaufmanproducts.net. **Circle 113.**

THIN OVERLAY

Thin-Finish is a pre-mixed overlay that can be used for decorative concrete finishes or as an underlayment for surface repair of old, spalled concrete surfaces in preparation for tile or other coatings. It is stronger



than concrete and can be colored to match any surrounding concrete surface. Elite Crete Systems Inc. 888-323-4445. www.elitecrete.com. **Circle 114.**

EARLY-USE UNDERLAYMENT

Designed for use in buildings with light-gauge steel frame construction, Levelrock CSD Early Exposure floor underlayment can be poured up to 60 days before the building's permanent windows and doors are installed (in non-freezing conditions). It has compressive strengths from 3500 to 5000 psi, and can withstand the rigors of trade traffic throughout the construction cycle. The underlayment can be applied much thinner than poured-in-place concrete, reducing the overall weight. USG. 800-487-4431. www.levelrock.com. **Circle 115.**

